





IP Address and Port Configuration




Service Bandwidth and Alarm Thresholds

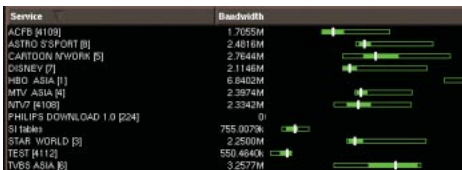

Integrated User Interface

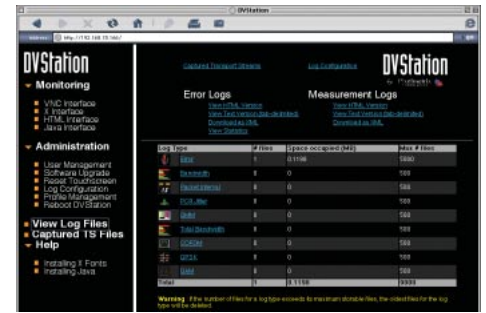

Extensive Log Management System

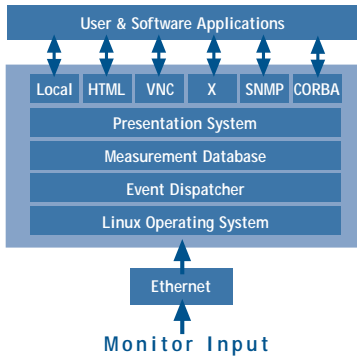

Pixelmetrix Corporation

The Americas

965 N. Nob Hill Rd. #114
 Ft. Lauderdale, FL 33324
 Tel: 954-472-5445
 Fax: 954-472-6989

Asia Pacific

27 Ubi Road
 #05-01 MSL Building
 Singapore 408 618
 Tel: +65 6547 4935
 Fax: +65 6547 4945

Europe

Haldenstrasse 24
 CH 8967 Widen, AG
 Switzerland
 Tel: +41 79742 7454
 Fax: +41 86079 742 7454

www.pixelmetrix.com

Ref: PPN30076
 Copyright © 2002 Pixelmetrix Corporation. All rights reserved.
 All other product or service marks are the property of their respective owners.
 This product includes software developed by LangBox International (<http://www.langbox.com/>)
 DVStation, DVStation-Pod, and DVStation-Remote are trademarks of Pixelmetrix Corporation. Data subject to change without notice.

SPECIFICATIONS

Test Port

- one multispeed Ethernet: 10, 100, 1000 Mb/s

Supported Standards

- MPEG-2 over UDP (defacto standard)
- MPEG-2 over RTP per DVB/ETSI TM2578r3

Mass Storage

- 32x CD-ROM
- 80 GB hard disk drive

Mechanical & Electrical Characteristics

- 19-inch, 1RU high rack mount enclosure
- 90 - 240 Vac, 47 - 63 Hz
- 5.0A at 115 Vac, 2.5A at 230 Vac, Max
- Operating temperature: +10°C to +30°C
- Storage temperature: 0° to +50°C

Local & Remote Control Interfaces

- HTML web browser
- Locally attached VGA monitor, keyboard, and mouse
- VNC remote client
- X-Window terminal client
- CORBA software application program library
- SNMP MIB for network management system

Auxiliary Interfaces

- 10/100BaseT LAN port for remote control
- Serial RS-232, DE-9P (2 connector)
- USB port
- PS/2 Keyboard/Mouse (2 connectors)
- VGA Out, 800x600 Resolution

Regulatory

- UL listed
- CE Mark

